


## QL703

The QL703 is a high stability oven controlled oscillator driven by an SC-cut crystal with excellent phase noise and short term stability in a hermetically sealed 50 x 50mm package. This product can be configured to any frequency between 5-100MHz. All our products are designed and manufactured in the UK by Quartzlock.

### KEY FEATURES

- Frequency range 5-100MHz
- Low phase noise
- Excellent short term stability
- Single 5 to 18V supply
- $<2 \times 10^{-10}$  aging per day
- Temp stability available to  $<1$ ppb (-20 to +70°C)
- Extended Temp range up to 125°C
- Sine wave or HCMOS/TTL

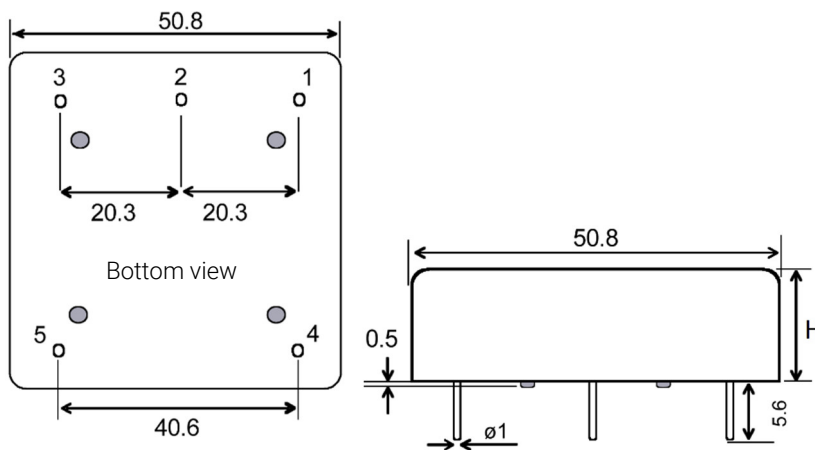

Pin	Function
1	RF output
2	Voltage Ref.
3	Freq. adjustment
4	Voltage Supply
5	Ground

### STANDARD MODELS

The table below shows the most common models; in most cases selecting one of these will ensure best combination of price, performance and availability.

Product Code	Frequency	Daily aging	Temp stability
QL703/DPEW-N-AX12	10MHz (sine)	$\leq 5 \times 10^{-10}$	$\leq 20$ ppb -20+70°C
QL703/EREW-N-AX12	10MHz (sine)	$\leq 3 \times 10^{-10}$	$\leq 10$ ppb -20+70°C
QL703/DPEW-Q-AX12	10MHz (HCMOS)	$\leq 5 \times 10^{-10}$	$\leq 20$ ppb -20+70°C
QL703/EREW-Q-AX12	10MHz (HCMOS)	$\leq 3 \times 10^{-10}$	$\leq 10$ ppb -20+70°C

## Electrical Specifications

Frequency	10MHz (Available frequencies 10.23, 12, 12.8, 13, 16.384, 20MHz)			
Aging per day (Typical)	<0.5ppb (Aging after 30 days of continuous operation) See options			
Aging per year	<30ppb			
Frequency stability vs Voltage supply	<1ppb per 10% change in V <sub>DD</sub>			
Short term stability (Allan Deviation)	<3 x 10 <sup>-12</sup> (τ = 1 Sec.)			
Storage temperature	-55 to +150°C			
Typical frequency stability Vs temperature	<10ppb over -20 to +70°C (see more options on page 3)			
Output waveform	Sine wave+8dBm (±1dBm) into 50 Ω (AC coupled) HCMOS, <0.5V to >4V level (10KΩ/15pF), 45-55% Duty cycle			
Frequency adjustment (Typical)	Positive Tuning Slop >4 x 10 <sup>-7</sup> over 0 to +8V (or specify) Sufficient for >10 years of aging >50K trim input impedance			
Voltage reference output (Typical)	8V for +12V supply, 4.5 for +5V supply. (See <a href="#">Note 1</a> )			
Supply voltage (V <sub>DD</sub> )	+12 (±5%)			
Power consumption	5W at warm-up <1.2W at steady state at 20°C			
Warm-up time from +25°C	≤2 after 10 mins			
Phase Noise (10MHz) dBc/Hz	Option A	Option B	Option C	Option D
1Hz	-100	-110	-115	-100
10Hz	-130	-135	-140	-125
100Hz	-148	-150	-152	-150
1KHz	-155	-155	-155	-162
10KHz	-158	-160	-160	-170
100KHz	-158	-160	-160	-170
Harmonics distortion	<-30			
Spurious	<-90			
Shock	IE68-2-27 Test Ea 50G for 11ms ( <a href="#">Notes 2</a> )			
Vibration	IE68-2-06 Test Fc 10-55Hz, 1.5mm 55-500Hz, 10G			

**Note 1:** Voltage reference can be configured to any voltage, and must be less than supply/operating voltage.

**Notes 2:** Stresses beyond the ratings provided may cause permanent damage to the device. Exposure to conditions outside of the recommended operating conditions listed above may adversely impact the device resulting in failures not covered by the warranty.

## Create a Part Number

**QL703 / X X XX - X - X X X - 10MHz**

Daily Aging	
5x10 <sup>-10</sup>	D
2x10 <sup>-10</sup>	E
1x10 <sup>-10</sup>	G

Temp. Stability	
±20ppb	P
±10ppb	R
±5ppb	S
±1ppb	T

Temperature code table			
-40	A	+25	N
-35	B	+30	O
-30	C	+35	P
-25	D	+40	Q
-20	E	+45	R
-15	F	+50	S
-10	G	+55	T
-5	H	+60	U
0	I	+65	V
+5	J	+70	W
+10	K	+75	X
+15	L	+80	Y
+20	M	+85	Z

Available up to 125°C

Supply Voltage	
5V	05
9V	09
12	12
15V	15
18V	18

Case Height	
15	L
19	X
24	Z

Phase Noise	
Option	A
Option	B
Option	C
Option	D

Waveform	
Sine	N
HCMOS	Q

### How to specify Temperature Code

First code	Lowest temperature A= - 40°C
Second code	Highest temperature Z= +85°C
Example	EW -20 °C to +70 °C

### Soldering guidelines

The unit should be mounted on the circuit board after any cleaning and drying process. Hand soldering is recommended with tip temperature of 370°C for 7 seconds and 430°C for 5 seconds maximum.

Care must be taken to avoid any excessive bending or stress on the mounting pins. This can cause failure of the glass seals in the base.

This product is not suitable for immersion in cleaning fluids and should not undergo any ultrasonic cleaning process.

Contact us to configure this product to meet your application.

**Designed and manufactured in the U.K.**

The Quartzlock logo is a registered trademark.

Quartzlock continuous improvement policy: spec subject to change without notice and not part of any contract.

Copyright © 2019. Issue 19.07

